


# BORG

## Important Safety Notice.

It is important that this product is operated according to the correct procedures.




This product is a simplified replaceable resin cylinder guard. This product is intended to reduce the damage to the cylinder and does not completely protect it.

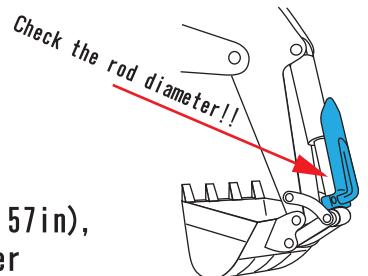


This product can be mounted in the rod diameter of  $\phi 40\text{mm}(1.57\text{in})$ ,  $\phi 45\text{mm}(1.77\text{in})$  and  $50\text{mm}(1.96\text{in})$ . Fix with the bundled retainer according to the rod diameter.



This product supports a cylinder stroke of  $600\text{mm}(23.62\text{in})$ . This product is compatible with 3 ton class of most construction equipment manufacturers can be mounted on buckets, arms and boom cylinders.

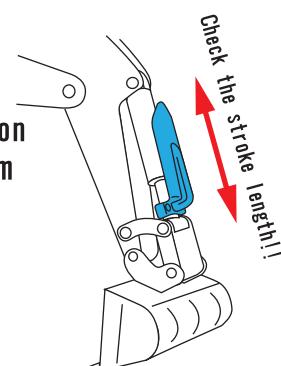


This product need minimum of  $35\text{ mm}(1.37\text{in})$  is required with the rod retracted. Check there are no irregularities on the rod surface.

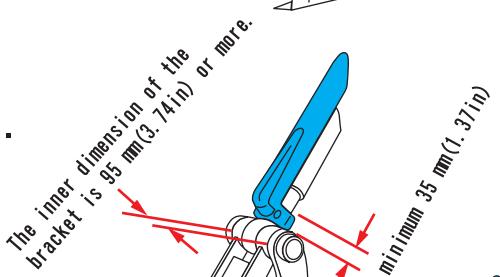

The maximum width of this product is  $95\text{ mm}(3.74\text{in})$ . Check the inner dimension of the bracket is  $95\text{ mm}(3.74\text{in})$  or more.



Check that there are no protrusions such as grease nipples near the mounting part of this product. Protrusions may cause damage.

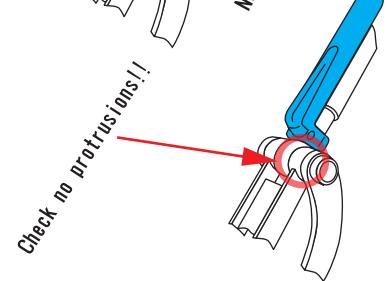

This product is made of resin. Excessive force can cause damage.



Watch out for strong winds on the transport truck. Fix with curing tape, string, etc.

Beware of strong winds!!



Please confirm whether this product can be mounted with a sample product.

